
BRONZE LIFT

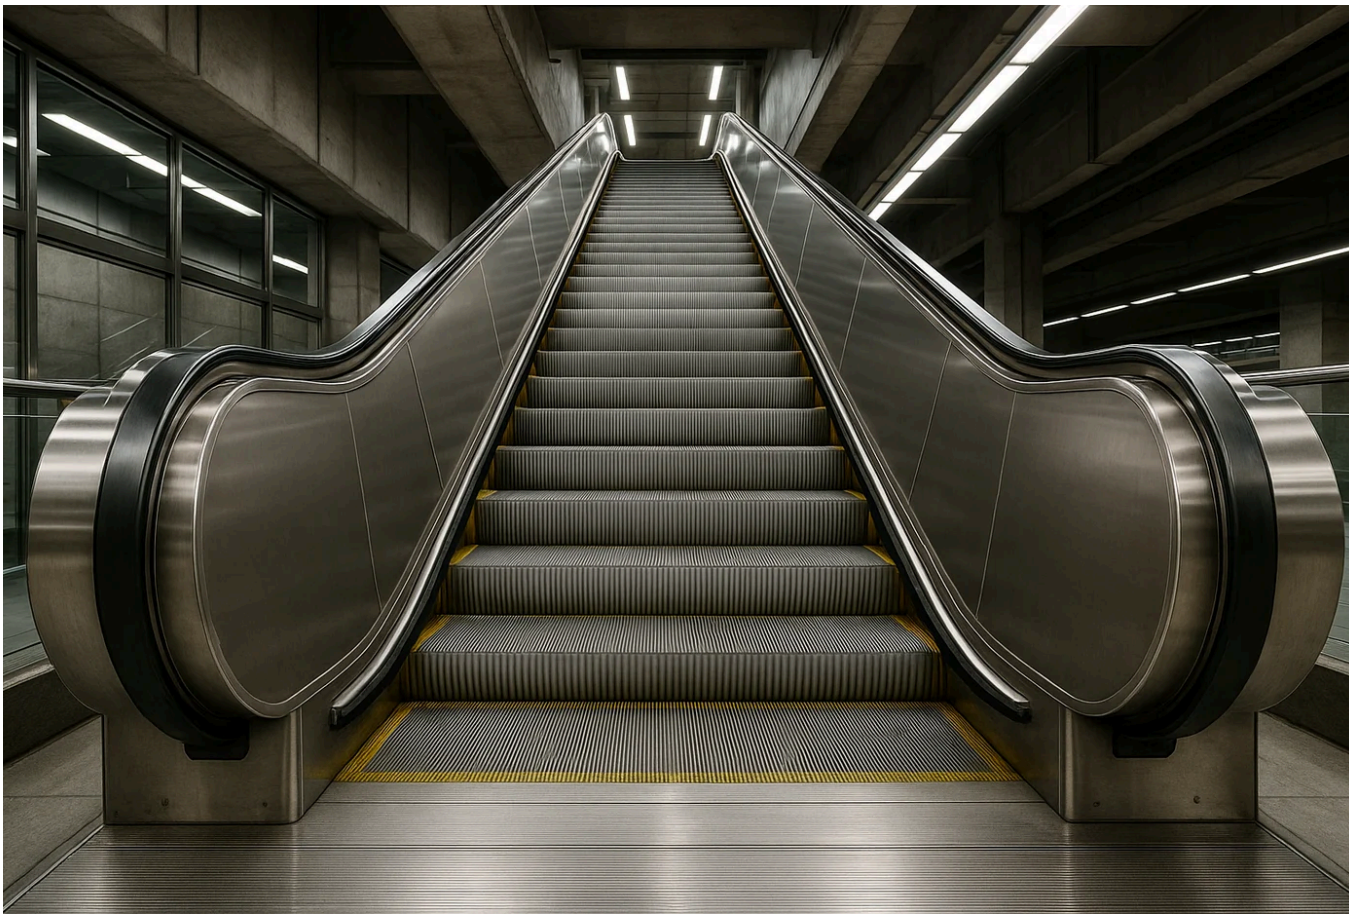

BROCHURE

Stride X

Stride X is the Bronze Lift escalator and moving walk line: two escalator models for rises from 2 to 35 m and two moving walk models up to 120 m in length, carrying up to 7,300 passengers per hour. Each model is specified per project against EN 115-1, in commercial and public transport duty versions that differ in operating hours and rise.

Stride X Transit, one of the four models in this line.

Document BL-BRO-STX-EN · Rev. 2026-10-22

Series at a glance

Stride X Com	Inclination 30 / 35 degrees · Step width 600 / 800 / 1000 mm · Horizontal steps 800 / 1200 mm · Speed 0.5 m/s · Rise 2-7.5 m · Up to 7300 passengers/hour · 16-20 operating hours/day · Indoor / outdoor / marine
Stride X Transit	Inclination 30 / 35 degrees · Step width 600 / 800 / 1000 mm · Horizontal steps 800 / 1200 mm · Speed 0.5 / 0.65 m/s · Rise 2-35 m · Up to 7300 passengers/hour · 20-24 operating hours/day · Indoor / outdoor / marine
Stride X Glide	Inclination 10 / 11 / 12 degrees · Pallet width 800 / 1000 mm · Horizontal pallets 400 mm · Speed 0.5 m/s · Rise 2-8 m · Max length 120 m · Up to 6000 passengers/hour · 16-20 operating hours/day · Indoor / outdoor (covered)
Stride X Flow	Inclination 0 / 6 degrees · Pallet width 1000 / 1200 / 1400 mm · No horizontal pallets · Speed 0.5 m/s · Rise 0-8 m · Max length 120 m · Up to 6000 passengers/hour · 20-24 operating hours/day · Indoor / outdoor (covered)

Models

Stride X Com

Stride X Com is the commercial duty escalator of the Stride X line: rises from 2 to 7.5 m, step widths of 600, 800 and 1000 mm, 0.5 m/s and 16 to 20 operating hours a day. Specified against EN 115-1 for retail, offices and hotels, in indoor, outdoor and marine versions.

Shopping mall · Office · Hotel · Locations and event

Stride X Transit

Stride X Transit is the public transport duty escalator of the Stride X line: rises from 2 to 35 m, 0.5 or 0.65 m/s and 20 to 24 operating hours a day. Step widths and inclinations match Stride X Com; what changes is the duty class, which is why it is specified for metro stations, airports and transit halls.

Public transport · Airport · Public building

Stride X Glide

Stride X Glide is the inclined moving walk of the Stride X line: inclinations of 10, 11 and 12 degrees, pallet widths of 800 and 1000 mm, rises from 2 to 8 m and lengths up to 120 m at 0.5 m/s. It is the unit for shopping floors and car parks where trolleys have to travel between levels.

Shopping mall · Airport · Locations and event

Stride X Flow

Stride X Flow is the horizontal moving walk of the Stride X line: 0 or 6 degrees, pallet widths of 1000, 1200 and 1400 mm, lengths up to 120 m at 0.5 m/s and 20 to 24 operating hours a day. It is specified for long level runs in airports, stations and exhibition halls.

Airport · Public transport · Public building

Conformity and warranty

Stride X escalators and moving walks are supplied in accordance with EN 115-1.

All supplied products carry a standard 24-month manufacturer's warranty from the date of delivery.

> For a project-specific proposal, send us the number of floors, the rated load and whether a shaft already exists.
>
> The complete dimension tables — car, door, shaft, headroom and pit — are in the fact sheet.

Catalogue data is indicative planning information and is not a commitment. Obtain confirmation from the engineering department before using these values in a specification or shaft design.